



Industrial Ethernet Switches

IES4016-8F

◆ 8-port 10/100M Ethernet+ 8-port 100Base-FX Unmanaged Switch

➤ Features

- Support IEEE802.3, IEEE802.3u, IEEE 802.3x
- Store and Forward switching process type
- Support MAC address auto-learning, auto-aging
- Support 8K MAC address
- Support 12.8Gbps backboard bandwidth
- Support redundancy power supply(12~48VDC)
- Support 1 channel relay alarm output
- Operating temperature range from -40 to 75 °C
- Designed without fan
- DIN rail mounted
- Metal shell, IP30 protection class



➤ Introduction

IES4016-8F is unmanaged Industrial Ethernet switch with high performance, high cost-effective, it provided 8 port 10Base-T/100Base-TX Ethernet+ 8 port 100Base-FX (FC/SC/ST). Product accorded to CE, FCC standard and Industry grade 4 design requirement, support 2 redundant power input and 1 channel relay alarm output, and -40~75°C working temperature, can meet all kinds of Industrial environment requirement. It can use in power, water conservancy, transportation area etc.

➤ Application

- Intelligent Transportation System
- Connection of Sub-network for Surveillance Center
- Power system applications
- High Way & Toll Station Surveillance
- Transformer Substation Communication System
- Oil of GPRS data acquisition system




➤ Specification

Technology	
Standard	Support IEEE802.3, IEEE802.3u, IEEE 802.3x,
Flow control	IEEE802.3x flow control, back press flow control
Exchange attribute	
100M forward speed	148810pps
100M maximum filter speed	148810pps
Transmit mode	store and forward
System exchange bandwidth	12.8G
MAC address table	8K
Memory	4M
Interface	
Electric port	10Base-T/100Base-TX auto speed control, Half/full duplex and MDI/MDI-X auto detect
100M optic fiber port	100Base-FX, SC/ST/FC connector, support single mode (20/40/60/80Km optional), multi mode (2Km), wavelength: 1310nm, 1550nm
Console port	Retain
Alarm port	2 bit terminal block, 1 channel relay alarm output
Transfer distance	
Twisted cable	100M (standard CAT5/CAT5e cable)
Multi-mode	1310nm, 2/5Km
Single-mode	1310nm, 20/40/60Km 1550nm, 80/100/120Km
LED indicator	
Run indicator	Run
Interface indicator	Link (1~16)
Power supply indicator	P1, P2
Alarm indicator	Alarm
Power supply	
Input Voltage	24VDC (12~48VDC)
Input method	4 bits 7.62mm terminal block
Support DC dual power supply redundancy	
Overload current protect	1.2A
Consumption	
No-load consumption	10.18@24VDC
Full-load consumption	12.26W@24VDC
Working environment	
Working temperature	-40~75°C
Storage temperature	-40~85°C
Relative Humidity	5%~95 % (no condensation)
Mechanical Structure	
Shell	IP30 protect grade, metal shell
Installation	DIN rail and wall mount
Size (W×H×D)	70mm×160mm×130mm

Industry Standard	
EMI	FCC Part 15, CISPR (EN55022) class A
EMS	EN61000-4-2 (ESD), Level 4 EN61000-4-3 (RS), Level 3 EN61000-4-4 (EFT), Level 4 EN61000-4-5 (Surge), Level 3 EN61000-4-6 (CS), Level 3 EN61000-4-8, Level 5
Shock	IEC 60068-2-27
Free fall	IEC 60068-2-32
Vibration	IEC 60068-2-6
Certification	CE, FCC, RoHS, PAL, UL508 (Pending)
Warranty	5 years

➤ Dimension

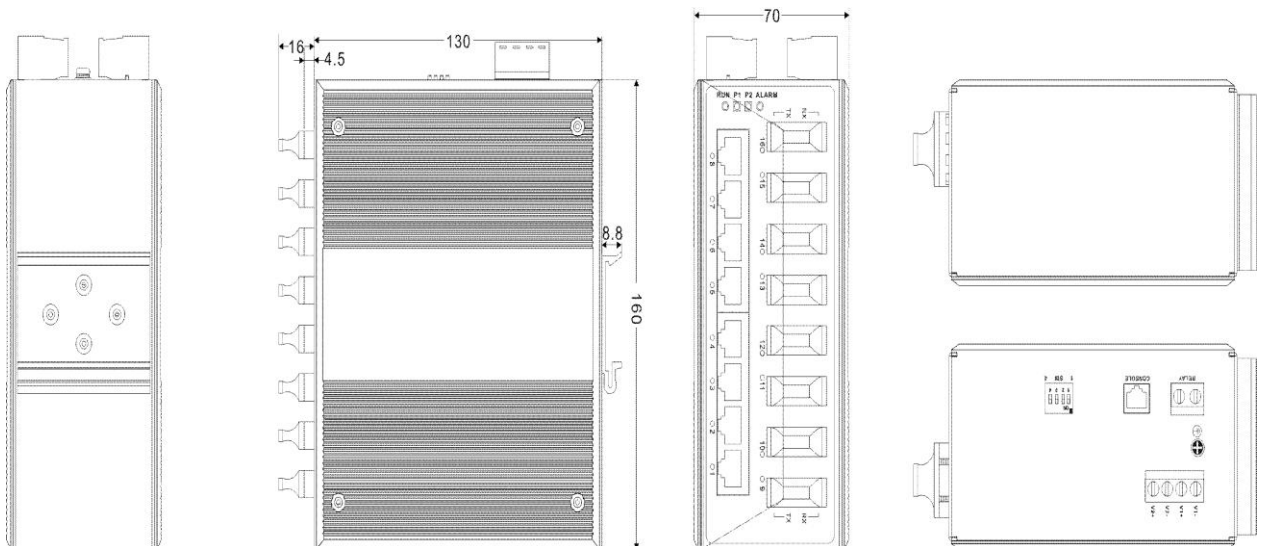

➤ Ordering Information

Model NO.	Description
IES4016-8F (M)	8 port 10/100Baes-T(X) + 8 port 100Base-FX Multi-mode SC/ST/FC, 12-48VDC
IES4016-8F (S)	8 port 10/100Baes-T(X) + 8 port 100Base-FX Single-mode SC/ST/FC, 12-48VDC
IES4016-8F (SS)	8 port 10/100Baes-T(X) + 8 port 100Base-FX single-mode, single fiber SC/ST/FC, 12-48VDC

➤ Packing List

- Industrial Ethernet switch IES4016-8F (plus terminal block) ×1
- User manual × 1
- Certificate of quality × 1
- Warranty card × 1