

**1-Port RS232/RS422/RS485 + 1-port 10/100M Ethernet, Din-Rail****➤ Features**

- Support 1-port 10/100M Ethernet + 1-port RS232/RS-485/422;
- Support IEEE802.3/802.3u standard, store and forward Exchange Mode;
- Support TCP server, TCP client, UDP three serial transmission mode, 2400~115200bps line speed non-blocking communication;
- Support TCP, IP, UDP, ARP, ICMP, HTTP and TFTP Client protocols;
- Support Web management;
- Support serial port settings, can connect two serial devices via Ethernet;
- Supports gateway, cross-routing communication;
- Low-power consumption design;
- Support serial port isolation function, isolation voltage 500V AC;
- Metal housing with IP40 and high level EMC protection;
- Support wide voltage 12-48V DC power input;
- Support DIN-Rail Mounting or Wall Mounting installation;
- Working temperature range:-40~85°C;
- Warranty:5 years

**➤ Introduction**

UPCOM MW1011 Din-Rail Industrial Serial Device Server support 1-channel RS232/RS-485/422 + 1-port 10/100Base-T(X), adopts high-strength IP40 protective shell, industrial-grade EMC design, supports Auto-Negotiation adaptive technology, provides LED status indication, and supports voltage 12~48V DC power input to increase the reliability of the communication network.

MW1011 can easily and conveniently centralize the management of scattered serial devices and hosts through the network. The communication rate supports 2400~115200bps optional. Based on industrial installation requirements, DIN35 rail or Wall Mounting installation mode provided. This product adopts the industry's excellent network solution, and the operating temperature range is -40~85°C, which can meet the requirements of various industrial scenes and provide convenient serial communication solutions.

**➤ Application Industries**


- Industrial Automation
- Intelligent transportation supervisory system (ITS)
- High-speed Way supervisory/Tele-Communication System
- Security Surveillance
- New Energy and Utilities
- Rail transportation industry

## ➤ Specification

Interface	
RJ45 port	10/100BASE-T(X) auto-Negotiation speed, auto duplex mode and MDI/MDI-X connection
Serial port	RS-422 supports RX-, RX+, TX-, TX+ full duplex working mode
	RS-485 supports D+ and D- half-duplex working mode
	RS-232 supports RXD, TXD, GND full duplex working mode
	RS-485/422/232 Communication rate support 2400~115200bps optional
Ethernet Attribute	
10M forwarding speed	14881pps
100M forwarding speed	148810pps
Rate	10M/100Mbps
Transmission way	Store and forward
Interface connector	RJ45
Serial Port Attribute	
Standard	RS-485/422/232
RS-422 signal	TX+, TX-, RX+, RX-, GND
RS-485 signal	D+, D-, GND
RS-232 signal	TXD, RXD ,GND
Check digit	None, Even, ODD
Data bits	5bit, 6bit, 7bit, 8bit
Stop bit	1bit, 2bit
Baud rate	2400~115200bps
Directional control	RS-485 adopts data flow control technology
Load capacity	RS-485/422 supports 32 point polling environment, can up to 128
Interface connector	RS-485/422 and adopts 5-bit 3.84mm spacing terminal
	RS-232 and adopts DB9-M interface
Interface protection	4000V surge protection
LED Indicator	
Power indicator	PWR
System running indicator	SYS
Serial port data status indicator	S1/S2
Power Supply	
Input	Wide voltage 12~48V DC power input, typical working voltage 12V/24V/48V, using 3-cores 7.62mm industrial power terminal
Idle running power	0.24W@24VDC

Full-load power	0.364W@24VDC
<b>Physical Characteristics</b>	
Shell	Metal, IP40 protection
Installation	Wall mounting or DIN rail mounting
Dimension	32mm×103mm×83mm (W*H*D)
Net weight	300g
<b>Environment Limits</b>	
Working Temp	-40~85°C
Storage Temp	-40~85°C
Relative Humidity	5%~95% (no-condensation)
<b>Industry standard</b>	
IEC61000-4-2	ESD: ±8KV Contact Discharge, ±15KV Air Discharge
IEC61000-4-3	RS: 10V/m (80-1000MHZ)
IEC61000-4-4	EFT: Power ±4KV, Ethernet & Serial Data Cable ±2KV
IEC61000-4-5	Surge, Power ±4KV CM/ ±1KV DM, Ethernet Data Cable±4KV CM, Serial Data Cable±1KV CM
IEC61000-4-6	Radio Frequency Conduction: 3V(10KHZ-150KHZ),10V(150KHZ-80MHZ)
IEC61000-4-16	Common Mode Conduction: 30V COUNT 300V, 1S
IEC60068-2-6	Vibration
IEC60068-2-27	Shock
IEC60068-2-32	Free Fall
IEC61000-6-2	General Industrial Standard
<b>Warranty</b>	
Warranty	5 Years
Certification	CE, FCC, RoHS (pending)

## ➤ Dimension

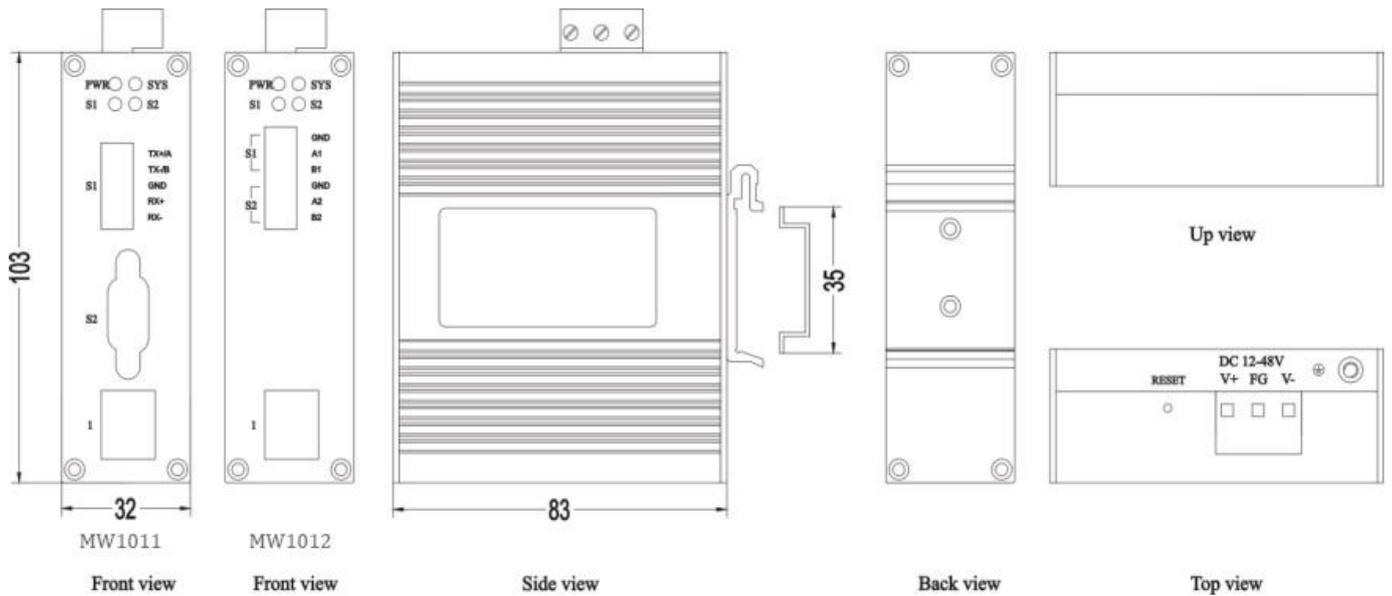

## ➤ Ordering Information

Model NO.	Description
MW1011	1-channel RS232/RS-485/422 + 1-port 10/100Base-T(X) RJ45, DC12-48V, 500V Isolation
MW1012	2-channel RS-485+ 1-port 10/100Base-T(X) RJ45, DC12-48V, 500V Isolation
MW1024	4-channel RS-485/422 + 2-port 10/100Base-T(X) RJ45, DC12-48V, 500V Isolation
MW1028	8-channel RS-485/422+ 2-port 10/100Base-T(X) RJ45, DC12-48V, 500V Isolation

## ➤ Packing List

- Industrial Serial Device Server \* 1
- User manual \* 1
- Certificate of quality \* 1
- Warranty card \* 1