



1-Port RS232/RS422/RS485 + 1-port 10/100BASE-T(X) Modbus Gateway, Din-Rail

➤ Features

- Support 1-port 10/100BASE-T(X) + 1-port RS232/RS-485/422 Modbus Gateway;
- Support IEEE802.3/802.3u standard, store and forward Exchange Mode;
- Support TCP server, TCP client, UDP , Modbus TCP (RTU_MASTER) serial transmission modes;
- Support 2400~115200bps line speed non-blocking communication;
- Support TCP, IP, UDP, Modbus TCP, Modbus RTU, ARP, ICMP, HTTP and TFTP Client protocols;
- Support RTU Master mode, maximum support 16 TCP master connections in this mode;
- Support Web management;
- Support serial port settings, can connect two serial devices via Ethernet;
- Supports gateway, cross-routing communication;
- Low-power consumption design;
- Support serial port isolation function, isolated voltage 500V AC;
- Metal housing with IP40 and high level EMC protection;
- Support wide voltage 12-48V DC power input;
- Support DIN-Rail Mounting or Wall Mounting installation;
- Working temperature range:-40~85°C;
- Warranty:5years



➤ Introduction

UPCOM MW1011G Din-Rail Serial Gateway support 1-channel RS232/RS-485/422 + 1-port 10/100Base-T(X), adopts high-strength IP40 protective shell, industrial-grade EMC design, supports Auto-Negotiation adaptive technology, provides LED status indication, and supports voltage 12~48V DC power input to increase the reliability of the communication network.

MW1011G can easily and conveniently centralize the management of scattered serial devices and hosts through the network. The communication rate supports 2400~115200bps optional. Built-in Modbus TCP, Modbus RTU protocol make it easy for users to connect Modbus Ethernet devices to Modbus serial devices. Based on industrial installation requirements, DIN35 rail or Wall Mounting installation mode provided. This product adopts the industry's excellent network solution, and the operating temperature range is -40~85°C, which can meet the requirements of various industrial serial communication solutions.

➤ Application Industries


- Industrial Automation
- Intelligent transportation supervisory system (ITS)
- Security Surveillance
- New Energy and Utilities
- Rail transportation industry

➤ Specification

Interface	
RJ45 port	10/100BASE-T(X) auto-Negotiation speed, auto duplex mode and MDI/MDI-X connection
Serial port	RS-422 supports RX-, RX+, TX-, TX+ full duplex working mode
	RS-485 supports D+ and D- half-duplex working mode
	RS-232 supports RXD, TXD, GND full duplex working mode
	RS-485/422/232 Communication rate support 2400~115200bps optional,Built-in ModbusTCP and Modbus RTU protocols, support RTU Master mode, maximum support 16 TCP master connections in this mode
Ethernet Attribute	
Standard	10Base-T, 100Base-TX
Protocol	IEEE802.3/802.3u standard, store and forward Exchange Mode
Rate	10M/100Mbps
Duplex mode	Full duplex or Half duplex
Interface connector	RJ45
Serial Port Attribute	
Standard	RS-485/422/232
RS-422 signal	TX+, TX-, RX+, RX-, GND
RS-485 signal	D+, D-, GND
RS-232 signal	TXD, RXD ,GND
Check digit	None, Even, ODD
Data bits	5bit, 6bit, 7bit, 8bit
Stop bit	1bit, 2bit
Baud rate	240~115200bps
Directional control	RS-485 adopts data flow control technology
Load capacity	RS-485/422 supports 32 point polling environment, can up to 128
Interface connector	RS-485/422 and adopts 5-bit 3.84mm spacing terminal
	RS-232 and adopts DB9-M interface
Interface protection	4000V surge protection
LED Indicator	
Power indicator	PWR
System running indicator	SYS
Serial port data status indicator	S1/S2
Power Supply	
Input	Wide voltage 12~48V DC power input,typical working voltage

	12V/24V/48V,using 3-cores 7.62mm industrial power terminal
Idle running power	0.24W@24VDC
Full-load power	0.364W@24VDC
Physical Characteristics	
Shell	Metal, IP40 protection
Installation	Wall mounting or DIN rail mounting
Dimension	103mm×32mm×83mm (W*H*D)
Net weight	300g
Environment Limits	
Working Temp	-40~85°C
Storage Temp	-40~85°C
Relative Humidity	5%~95% (no-condensation)
Industry standard	
IEC61000-4-2	ESD: ±8KV Contact Discharge, ±15KV Air Discharge
IEC61000-4-3	RS: 10V/m (80-1000MHZ)
IEC61000-4-4	EFT: Power ±4KV, Ethernet & Serial Data Cable ±2KV
IEC61000-4-5	Surge, Power ±4KV CM/ ±1KV DM, Ethernet Data Cable±4KV CM, Serial Data Cable±1KV CM
IEC61000-4-6	Radio Frequency Conduction: 3V(10KHZ-150KHZ),10V(150KHZ-80MHZ)
IEC61000-4-16	Common Mode Conduction: 30V COUNT 300V, 1S
IEC60068-2-6	Vibration
IEC60068-2-27	Shock
IEC60068-2-32	Free Fall
IEC61000-6-2	General Industrial Standard
Warranty	
Warranty	5 Years
Certification	CE, FCC, RoHS (pending)

➤ Dimension

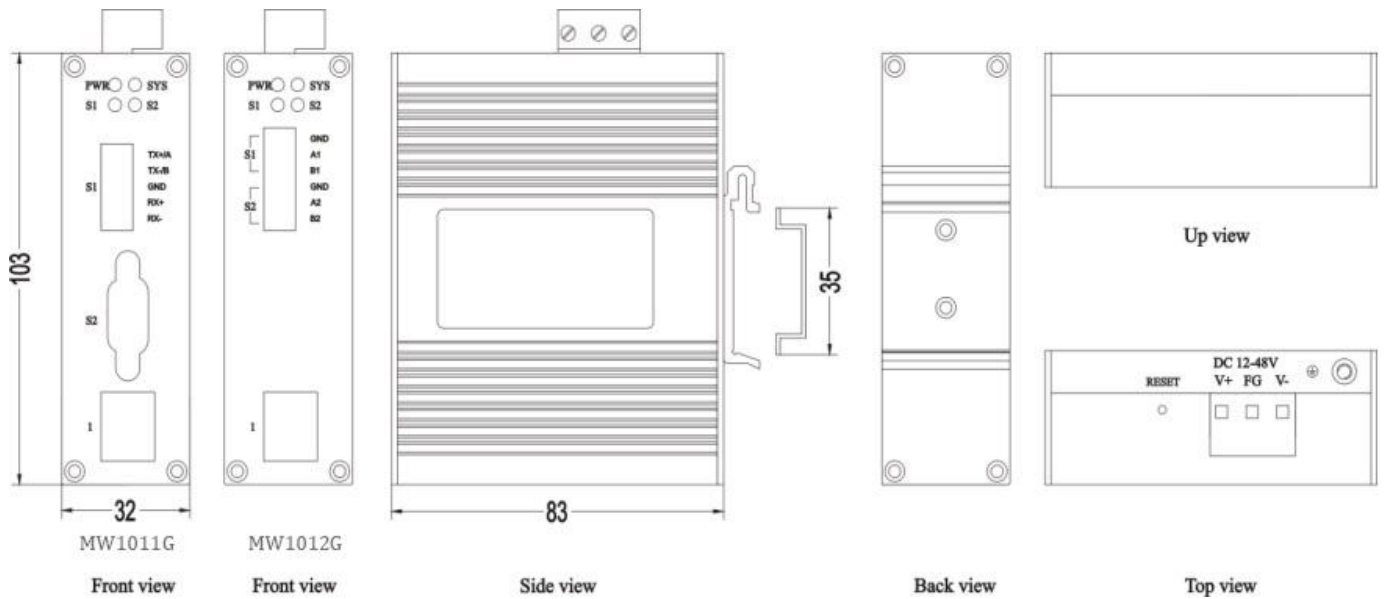

➤ Ordering Information

Model NO	Description
MW1011G	1-channel RS232/RS-485/422 + 1-port 10/100Base-T(X) RJ45, Modbus Gateway, DC12-48V
MW1012G	2-channel RS-485+ 1-port 10/100Base-T(X) RJ45, Modbus Gateway, DC12-48V
MW1024G	4-channel RS-485+ 2-port 10/100Base-T(X) RJ45, Modbus Gateway, DC12-48V
MW1028G	8-channel RS-485+ 2-port 10/100Base-T(X) RJ45, Modbus Gateway, DC12-48V

➤ Packing List

- Modbus Gateway *1
- User manual * 1
- Certificate of quality * 1
- Warranty card * 1