



## VGA To Fiber Converters **VGA0111-3G-MK**

### ◆ VGA To Fiber Converters with keyboard and mouse+ 1 audio+1 RS232, 3G

#### ➤ Features


- Transmits VGA video signals up to 10km over one fiber optic cable
- Support video resolution up to 1920\*1080P@60Hz
- Support keyboard and mouse signal transmission
- Support external stereo audio unidirectional transmission
- Support transmitter one channel signal output
- Support RS232 signal bidirectional transmission, baud rate self-adaptive
- High compatibility, can auto-match source and display device
- Built-in automatic adjustment system, make the image smooth, clear and stable
- Built-in ESD protection system
- Simple to install, plug and play



#### ➤ Introduction

The VGA0111-3G-MK Fiber optic extender provides extension of VGA signals long distances over one fiber optic cable, it supports high resolution up to 1080P, KVM, transmitter local output, RS232 signal and external audio transmission function. The extender can use for a wide range of applications requiring long distance transmission of high resolution with high quality by its good stability and powerful security.

#### ➤ Application

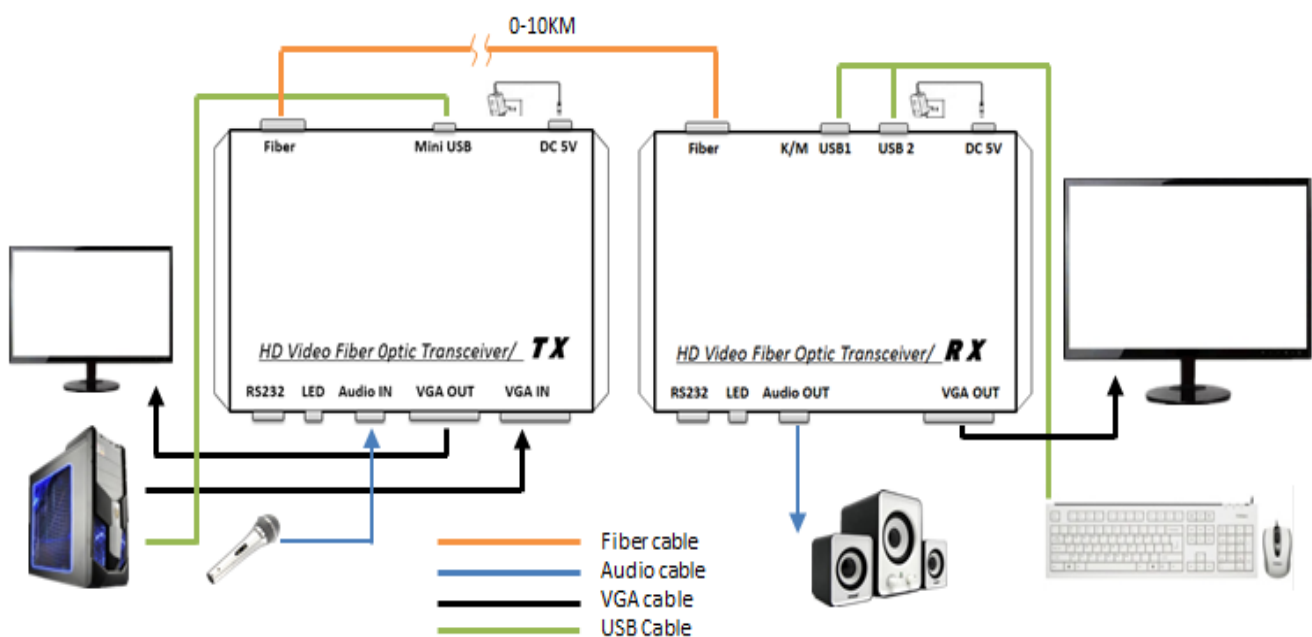

## ➤ Specification

Video	
Standards	VGA
Maximum pixel clock	380MHz
Resolution	1920x1200@60Hz / 1920x1080@60Hz 1600x1200@60Hz / 1680x1050@60Hz 1280x1024@60Hz / 1280x1024@75Hz 1280x800@60Hz / 1280x768@60Hz 1280x720@60Hz / 1024x768@60Hz 1024x768@75Hz / 800x600@60Hz/75Hz
Impedance	75Ω
Audio	
Interface	3.5mm earphone seat
Format	44.1K,48K,96K,176K,192K
Signal type	Stereo
K/M	
Interface	To PC: MINI-USB To keyboard and mouse: USB-A
RS232	
Interface	Industrial terminal
Signal direction	Bidirectional
Baud rate	Self-adaptive, Max: 115200bps
Data bits	8
Optical fiber	
Interface	LC connector
Fiber type	Single-mode, single fiber
Wavelength	Single-mode 1310nm
Interface bandwidth	3Gbps
Transmission distance	standard 10km
Other	
Power supply	The power adapter: DC 5V/2A
Power dissipation	MAX 6W
Temperature	Operating: -5°C ~ +70°C
Humidity	Operating: 5% ~ 90%
Dimension	155*115*30mm
The warranty	1 year free warranty

## ➤ Packing List

- VGA optical fiber transmitter ×1
- VGA optical fiber receiver ×1
- Fiber optic module×2
- Power adapter×2
- User manual ×1